



CAMERA
accessories
CLASSIC Line

DIVE Line - see extra catalogue

Dealer's purchase list prices included

ORTEC Products

March 2015

ORTEC R.C.F.GmbH
D-84030 Landshut, Germany
Tel.: 0049-871-72727 Fax: 0049-871-71297
E-Mail: Ortec-Products@t-online.de
www.Ortec-Products.de

New products - 2015



New products - end of 2014



New products - end of 2014



Steel
insert



New products - end of 2014 - Cont.



New products - end of 2014 - Cont.



General information concerning the ORTEC DKG double ball joint system

With regard to the adjustability of the tilt head, no wish remains open, thanks to the brilliant ORTEC double ball joint system DKG

The DKG double ball joint system with clamping brackets out of stainless steel ensures a gigantic range of adjustability and guarantees a very tight fit.

Clamping occurs via highly robust steel pressure plates which press against a double ball joint system with their circular notches.

This way, the fixation is steady as a rock, as there is no pressure on the surface of the ball, but the pressure takes effect alongside the rim of the circular notches.

This means that slipping is nearly impossible.

The double ball joint system is optimized for an extremely wide range of adjustable angles.

DKG single components and system components:

Our DKG VERSA MOUNT system components to be combined individually on the basis of 16 mm and 25 mm (= 1 inch) balls are displayed in the separate special Versa Mount catalogue.



Nearly all mounts are available with:

1. Our ORTEC VARIO elastic hook and loop closure system or
2. Our special Go-Q 3-Link Joint System for GoPro(R) cameras

The VARIO closure system for the shafts of CAMs and flashlights has got an elastic and adjustable hook and loop closure to fit various shaft diameters.

Also a reliable pretension is provided. Fits shaft diameters up to appx. 28mm.

The Double Version is ideal for a minimum shaft-length of appx. 70 mm.

The Single Version (short model) is ideal for a minimum shaft-length of appx. 30mm



Please see trademark details on last catalogue page

Tel.: 0871-72727 / Fax: 0871-71297

ANTI-FOG WIZARD PADS - Highly Efficient Desiccant

**All come with pads in a sealed bag
and with
with 2 extra bags (reusable)**

**Pads with a tremendously high absorption rate
Rate is appx. 3 times higher than Silica Gel desiccant
For use inside of cameras housings
Pad size 35x15mm**



**FOG WIZARD PADS
Anti Fog Pads
with extra box**

**FOG WIZARD PADS
Anti Fog Pads
with 2 bags**



ANTI Fog Wizard Pads + Box
**With additional and very tough plastic box for
protection of pads**

50 pads with 2 reusable plastic bags

with extra box
665311



ANTI Fog Wizard Pads
50 pads with 2 reusable plastic bags

665301

Asterixed prices are net prices

Tel.: 0871-72727 / Fax: 0871-71297

8

www.Ortec-Products.de

Go-Q Adapter Sockets for GoPro (R) cameras

3 Prong Adapter Sockets made especially for GoPro(R) camera housings

Made of very sturdy and tough HD plastic
With 1/4" camera thread (metal) at the bottom
No plastic thread - No aluminium thread

SCREW-ON Socket - Wide

With 2 extra fixation holes (5mm)

EXTRA SLIM Socket

Slim and narrow design



Price cut

Adapter Socket Go-Q, slim +1/4"

Diameter appx. 26mm

664621 black



Price cut

Adapter Socket Go-Q, wide +1/4"

Hex nut M5 can temporarily be removed for fixation purposes.
Diameter appx. 40mm

664611 black

Please see trademark details on last catalogue page

Tel.: 0871-72727 / Fax: 0871-71297

Go-Q Adapter Sockets for GoPro (R) cameras

Adapter Sockets made especially for GoPro(R) camera housings

With threaded bolt (steel) at the bottom
Ideal for attachment to bars, planks, boards

With stainless steel HD hex nut for the camera tightening screw.
Body made of HD plastic

EXTRA SLIM Socket with bolt

Threaded bolt: M8x25

Go-Q
New



Adapter Socket Go-Q slim + M8x25

Diameter appx. 26mm
With threaded bolt and washer and nut:

66462a black, M8x25

Please see trademark details on last catalogue page

Tel.: 0871-72727 / Fax: 0871-71297

10

www.Ortec-Products.de

ORTEC
Products

CAMERA Wall and Ceiling Mounts

Stationary Mount DKG-M extremely robust



Go-Q Link



Stationary mount 80 Large, DKG

Extremely robust, big base with boreholes and with a double ball joint system DKG for an extremely wide adjusting range. Dia 80mm.

Version with thread:

With 1/4" camera thread
663931 1/4"

Version VARIO

For different diameters, camera is fixed with an adjustable, elastic hook and loop closure.

663941 VARIO

With Special 3-Link Go-Q Link System

66394q Go-Q

Wall and Ceiling Mounts - continuation

Adhesive Mount VARIO elastic

Elastic, large base plate with self adhesive backing.

Can even be mounted on slightly curved surfaces.

Adheres extraordinarily on most materials (except for low quality plastics).


The camera is fixed with an adjustable, elastic hook and loop closure.

VARIO design for different diameters, thus suitable for many CCD compact cameras.

For long shafts > 7cm



For short shafts > 3cm

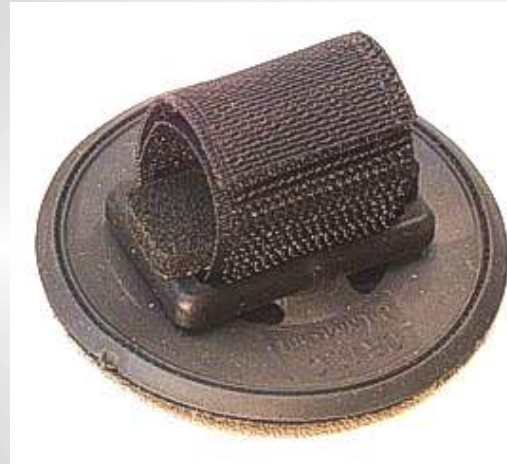

Adhesive Mount VARIO, double

With extra rubber pad against slipping of shaft.
One adhesive patch included.

66425g Vario double

Spare self adhesive patches

Front and rear side self adhesive.

664271 2 sets

Adhesive Mount VARIO, short

With extra rubber pad against slipping of shaft.
One adhesive patch included

66425k Vario short

Spare self adhesive patches

Front and rear side self adhesive.

664271 2 sets

CAM ANCHOR Plate Aluminium Go-Q DUAL-USE

DUAL USE - may be bonded or bolted

With large HD Self Adhesive patches (double sided)

With 5 mm holes for screw-on application

Fits GoPro Hero Cameras

X-large 8 x 8 cm for a real tight hold

Very robust and sturdy aluminium plate

**X-large
8x8cm**

**Extremely strong adhesive
patch - replacement**



Self adhesive patches HD

HD self adhesive patch (double sided) for most plastic and metal surfaces (requires individual tests prior to use).

66467a set of 2



Anchor Plate Alum. Go-Q Dual-Use

Dual use:

1. With self adhesive HD bonding patch
2. With 4 holes for 5mm threaded bolts.

Fits GoPro camera housing
Dimension: 8x8cm

Included:

1 anchor plate and 1 HD self adhesive patch, 1 cord, 1 eyelet plate

664671 8x8 cm

Tie Down Plates

Tie down plate with Go-Q Base rotatable



Tie down Plate with Go-Q Base Rotatable for adjustable angularity and a perfect alignment.

With distance ring between adapter and plate.
Plate size 8x8cm
Under construction - on request
66302a

Tie down plate for original Go-Pro(R) Adapter - rotatable




**Adapter itself
not included**

Tie down Plate for GoPro(R) Adapter Rotatable for adjustable angularity and a perfect alignment

Made for the use of the original GoPro(R) tripod mount adapter.
Included: Plate with spacer and 1/4" screw - GoPro adapter itself is not included
Adjustable angularity; plate size 8x8cm
With distance ring between adapter and plate.
GoPro(R) adapter itself not included
66302b for Go-Pro(R) adapter



Tie down plate DKG 16

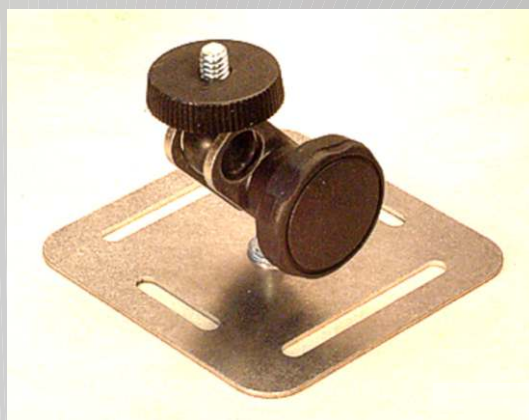

**Go-Q
Link**



Tie down plate DKG16

8 cm wide plate with oblong holes for tie down straps (up to 25 mm resp. 50 mm width).

With DKG double ball joint system for an extremely wide adjustment range.

Version with thread:

66301g 1/4"

Version VARIO double:

66301v

Version VARIO single:

66301k

With Special 3-Link Go-Q System

66301q Go-Q link

Please see trademark details on last catalogue page

CAMERA Pipe Clamps

Pipe Clip DKG



**Go-Q
Link**

Double Mount - Parallel XXL - SUPERSOFT

Expandable up to appx. 50mm



Pipe Clip Double Joint - rotatable

For pipes with diameters between approx. 16 to 23 mm. For other diameters on request.

Version with 1/4" thread for pipe dia D:

66450g D=16-18
66451g D=18-20
66452g D=20-23
66453g D=23-25,5

Version VARIO Double for pipe dia D:

66450v D=16-18
66451v D=18-20
66452v D=20-23
66453v D=23-25,5

Go-Q Link system for pipe dia D:

66450q D=16-18; Go-Q
66451q D=18-20; Go-Q
66452q D=20-23; Go-Q
66453q D=23-25,5; Go-Q

Double Mount XXL - parallel model

Adjustable to different diameters up to approx. 50 mm.


Soft rubber-like half shells adjust themselves perfectly to bar and camera.

Elastic hook and loop closure straps may be shortened.

664051

CAMERA Bar Clamps

Large-diameter Bar Mount XL - DKG
up to dia appx 2"=54mm

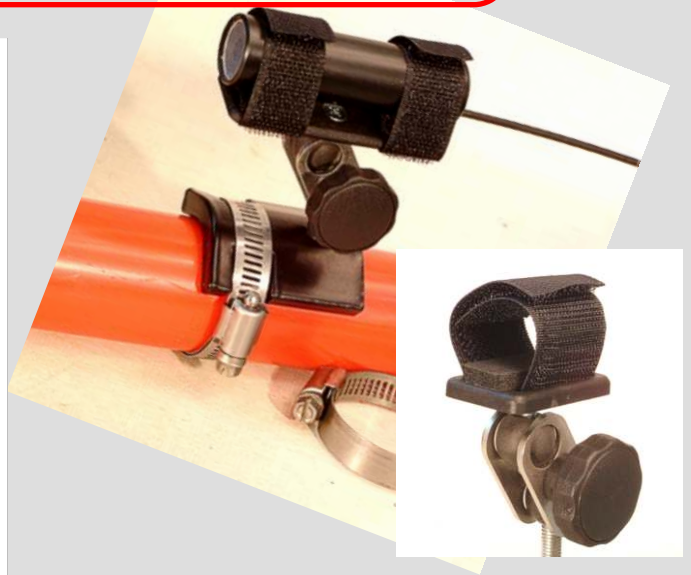

NEW: With
protective sleeve



Bar Mount XL, DKG16

Perfect as a mount for roll bars !

With double ball joint DKG for an extremely wide range of adjustment.

Bomb-proof mount to be fixed on extra-large pipes with a diameter of up to 54 mm = 2 inch.

Perfect e. g. for roll bars (if installed inside of a vehicle, all sharp edges have to be covered!).

1/4" Version:

664411

VARIO Double Version, 7cm long:

664421

VARIO Single version (short), 3 cm long:

66442k

Go-Q Link System:

66442q

Go-Q
Link




XXL

Fixation with 2 hose clamps with protective sleeves
Extra tight fit - Extra large 25mm ball joint
up to dia appx 2"=54mm


XL 25mm balls



NEW: With protective sleeve

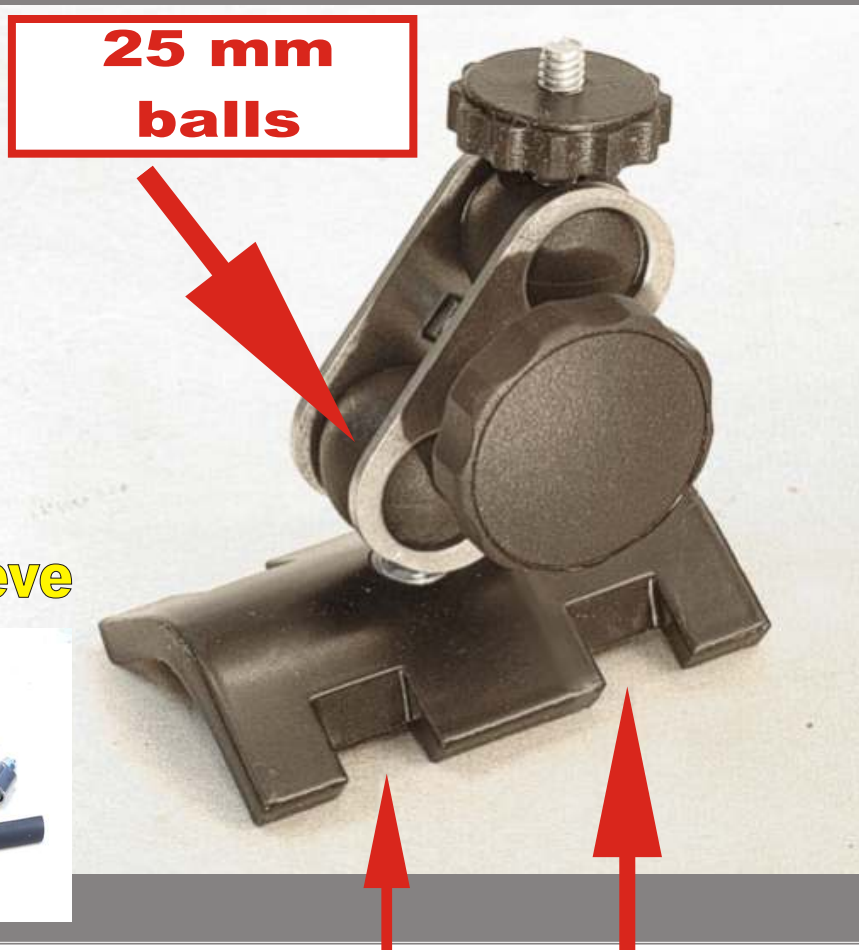

Size comparison
Single Fix - DUAL Fix

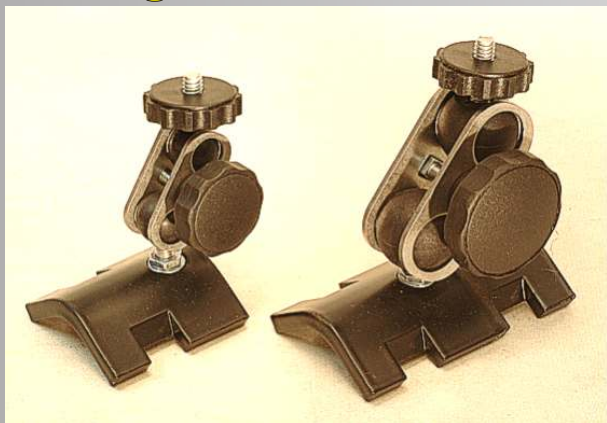

Double fixation

Bar Mount XXL - DUAL-FIX, DKG25

Perfect as a mount for roll bars !

With double socket joint DKG for an extremely wide range of adjustment.

Bomb-proof mount to be fixed on extra-large pipes with a diameter of up to 54mm = 2inch.

Perfect e. g. for roll bars (if installed inside of a vehicle, all sharp edges have to be covered!).

Version with thread.

With 1/4" camera thread and 25 mm ball joint.
664431

Handle Bar Mounts KU

Handle Bar Mounts DKG 16 - KU
Made of very sturdy and very tough plastic

Very tight hold

Very robust

Rattle proof


For a perfect fit

Double ball joint DKG (16mm ball diameter) for an extremely wide adjustment range

With HD stainless steel pressure plates for an ultra tight fit

Handle Bar Mount KU with two-piece clip

1/4" model

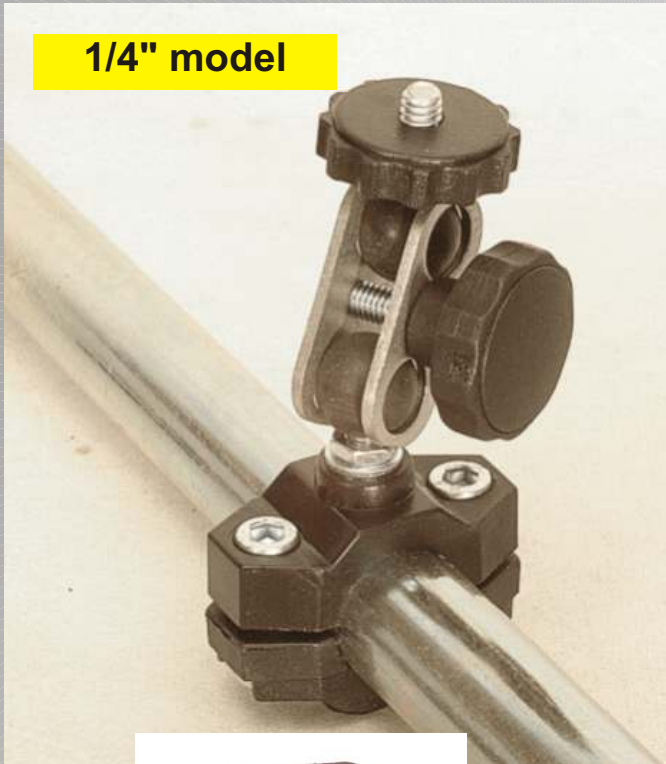

**Go-Q
Link**



Vario model

Handle Bar Mount KU w two-piece clip

Fits bars with diameter BD(mm).

1/4" Version HD:

66410c	BD 20 to 22,5mm
66410d	BD 25mm
66410e	BD 32mm

Go-Q Link System HD:

66412c	BD 20 to 22,5mm
66412d	BD 25mm
66412e	BD 32mm


Vario version on request

Heavy Duty Saddle Rail Mount Go-Q

**Extremely tough and sturdy for a really tight fixation
For very demanding applications**

Support plate made of unbreakable ted steel - no dodgy plastic
Fixation at parallel saddle rails (distance appx. 43mm center to center)
Fits most common saddles
Go-Q adapter socket (for GoPro(R) cameras) made of very tough plastic

"Unbreakable" support plate

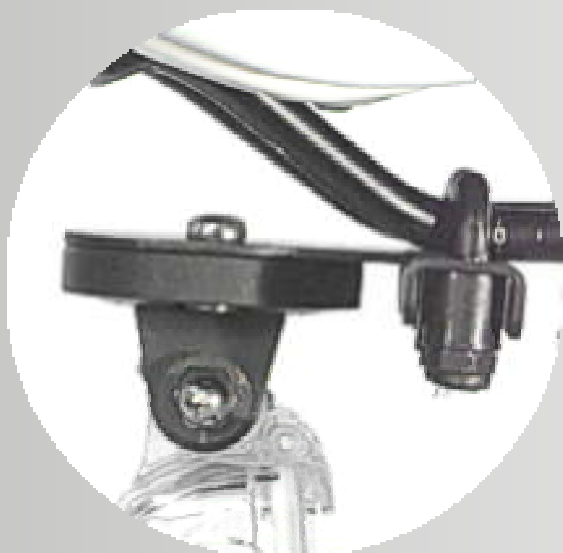

Saddle Rail Mount Go-Q

With Go-Q socket for GoPro(R) and ActionPro(R) cameras

66680q

66680q mind. 10

66680q mind. 25



**Go-Q
adapter**

Saddle Seat Post Mount - especially vibration proof

For posts with diameter 25mm up to even 32mm

Especially shake proof and vibration proof

Made for High End Sportbikes with 31,6mm!

With steel bracket for the seatpost and steel extension plate

With Go-Q socket for GoPro(R) cameras

Mount can be flipped over if different height of socket is desired

Not to be used at carbon fiber seat posts

"Unbreakable" support even for downhill rides



Especially vibration proof



Seat Post Mount Go-Q

With Go-Q socket for GoPro(R) cameras

66681q

66681q ab 10


66681q ab 25



C-Clamps HD

C - Clamp ALUMINIUM HD, ultralight

Only appx. 130 g. A solid lightweight
- ideal on the go!!

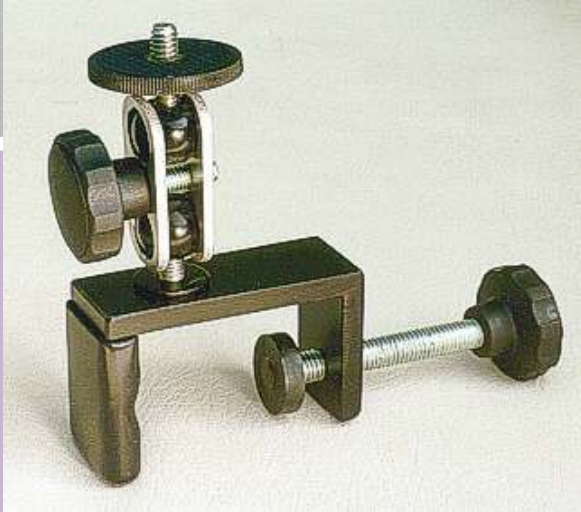

Very compact and particularly solid clamp for
handrailings, edged poles etc.


May be clamped at open car window panes, shelves, tables, cupboard doors, mechanical parts, handrailings, parts of furniture, beams...

Clamp out of HD aluminum alloy.
Clamping range up to approx. 42 mm.

Fits flat and round objects



**Go-Q
Link**



C - Clamp ALUMINIUM with joint system

C-Clamp Aluminium HD


1/4" Version:
663041

VARIO Double version (long), 7 cm long:
663031

Single version (short), 3 cm long:
66303k

Go-Q Link System:
66303q

Price cut

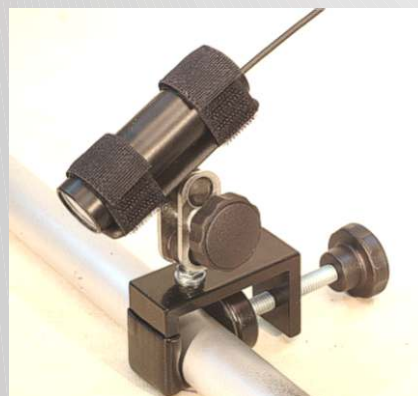

Spring Clamps HD - black

Spring Clamps DKG NYLON

Ultra-light - With DKG double ball joint system for an extremely wide adjustment range.
Allround clamp for all experts who demand great stability - at an extremely low weight.

May be clamped at handrailings, panes, beams

Fits flat and round objects.

11 cm version and 16cm XXL version available

11cm version

clamping range
up to appx.
40mm



16cm XL version

clamping range
up to appx.
60mm



Price cut

Spring Clamp DKG 16, black
11 cm long - 16 mm balls:

1/4" Version:
663301

VARIO double version (7 cm long):
66330v

VARIO single version (short, 3 cm long):
66330k

Go-Q Link System:
66330q

Spring Clamp XL DKG 25, black
16 cm long, 25mm balls:

1/4" version:
With 1/4 inch camera thread
66331g

3/8" version:
66331h

Spring Clamps Nylon - XHD blue

Extremely tough and strong

With DKG double ball joint system for an incredibly wide adjustment range
Extra heavy duty clamp for all experts who demand a particularly great stability

May be clamped at handrailings, panes, beams

Fits flat and round objects

Clamping range (at flat objects) up to appx. 40 mm

Comes with VARIO adapters or with clips or with 1/4" camera thread
11 cm version and 16cm XXL version available

Spring Clamps DKG NYLON XHD

**Extremely tough spring clamps
Extraordinarily strong**



**11 cm large
X-tra Heavy Duty
version**

**clamping range
up to appx.
35mm**



Spring clamp 11 cm XHD-DKG 16:

1/4" Version:
66333g

VARIO double version (7 cm long):
66333v

VARIO single version (short, 3 cm long):
66333k

Go-Q Link System:
66333q

Spring Clamps Nylon XHD blue - Cont.

Spring Clamps DKG NYLON XHD - Extra large

**Extremely tough spring clamps
Extraordinarily strong**

For nearly all flat and round items to be fixed.
For round and flat objects

**Clamping range (at flat objects) up
to appx. 54 mm = 2 inch**

**Length: 16 cm
X-tra Large
X-tra Heavy Duty
25mm balls**

**25 mm
balls**



With XL 25mm balls

Spring clamp 16 cm XHD-XL, DKG 25

On request

**1/4" version:
66335g**

**3/8" version:
66335h**

Flex Mount CLAMPS - DOUBLE USE

Comes with a 1/4" bolt (with thumb nut) and with an extra Go-Q socket

C - Clamp Aluminium + Flex Rod 15cm - Double Use


Double use
1/4"+Go-Q

clamping range
up to appx 55mm=1"

C-Clamp Alumin.+Flex Rod, 1/4"+Go-Q

With 15cm flex rod
With 1/4" threaded bolt and with G-Q socket

666321 1/4" + Go-Q

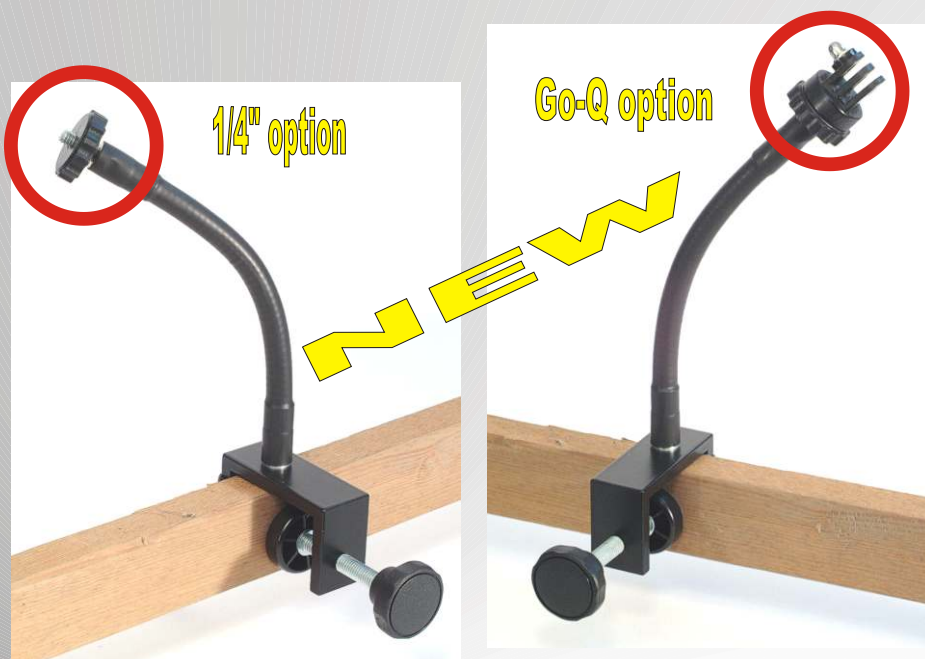

HD Spring Clamp XXL + Flex Rod 15cm - Double Use



Double use
1/4"+Go-Q



clamping range
up to appx 42mm

Spring Clamp XXL+Flex Rod, 1/4"+GoQ

Blue HD clamp with a clamping range up to appx. 55mm=2"
Length of clamp appx. 16cm
With 15cm flex rod
With 1/4" threaded bolt and with G-Q socket

Colour: Black

666341 1/4" + Go-Q

Magnetic mounts

Magnetic Mount **DKG** - dia 32 and 40mm

32mm diameter

With DKG double ball joint system for an extremely wide adjustment range.
Comes with an extra strong magnet!
For machines, automobiles, shelves, switch cabinets ...
Go-Q model for GoPro(R) and ActionPro Kameras.

40mm diameter



**Go-Q
Link**



**Go-Q
Link**



Magnetic mount 32 mm, DKG16

With 32 mm magnet, 16mm balls.

1/4" Version:

66339g

Go-Q Link System:

66339q

VARIO Single version, 3 cm long:

66339k

Magnetic mount 40 mm, DKG16

With 40 mm magnet, 16mm balls

1/4" Version:

663401

Double version, 7cm long:

663411

Single version, 3cm long:

66341k

Go-Q Link System:

66341q

Magnetic mounts - cont.

Magnetic Mount XXL - diameter 63mm

Holding Power appx. 29 kg
(on 10mm steel - static load)

With DKG double ball joint system for an extremely wide adjustment range.

Comes with an especially strong strong magnet!

For machines, automobiles, shelves, switch cabinets ...

Go-Q model for GoPro(R) and ActionPro Kameras.



dia 63 mm

Magnetic mount XXL, 63mm

With an extra-large base (63 mm). Also suitable for heavier cameras. 16mm balls

VARIO Double Version, 7 cm long:
663461

1/4" Version:
663451

Go-Q Link System:
66345q

Herculian Magnetic Mount XHD - dia 80mm

DKG = double ball joint system

**Gigantic Magnetic Mount XHD with magnet diameter = 100mm
with XL 25mm DKG double ball joint system**


With 1/4" or 3/8" thread

Extremely strong magnet
Usable also for heavier cameras

**XL 25mm double ball
joint system**

**25 mm
balls**

**80 mm
magnet dia**

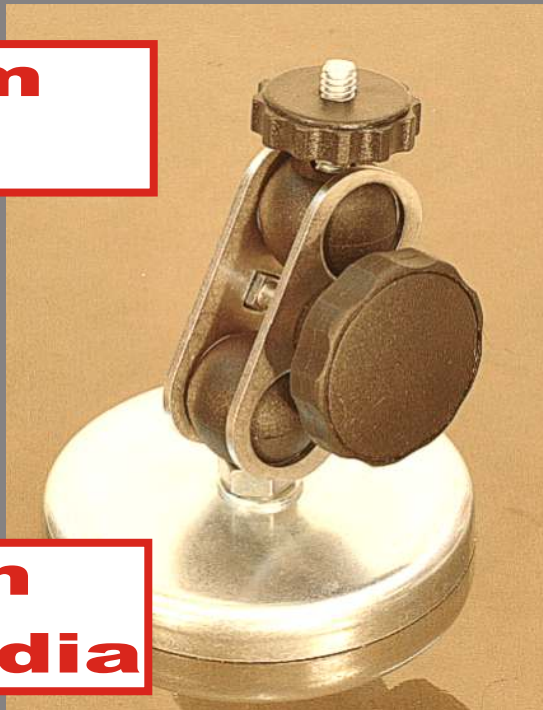

**A real Herculian Mount
Holding Power appx. 45 kg
(on 10mm steel - static load)**

Magnetic mount XHD, dia 80mm, DKG

With an extra-large magnet for an extremaly strong hold.
Also suitable for heavier cameras.

1/4" Version:
663471

3/8" Version:
66347h

Tiltable Magnetic Mount 4 x 32mm

Magnetic Mount for curved objects

Base plate 60 x 60 mm

Very big holding power due to tiltable magnets




**4 x 32mm
magnet**

**Ideal for
curved
objects**



**With tumb nuts for easy detachment
(if magnets are holding too strong)**

Warning:
**Must not be used on regular traf-
fic roads.**
**When attached to moving vehi-
cles a safety leash must be used
to prevent device from dropping.**

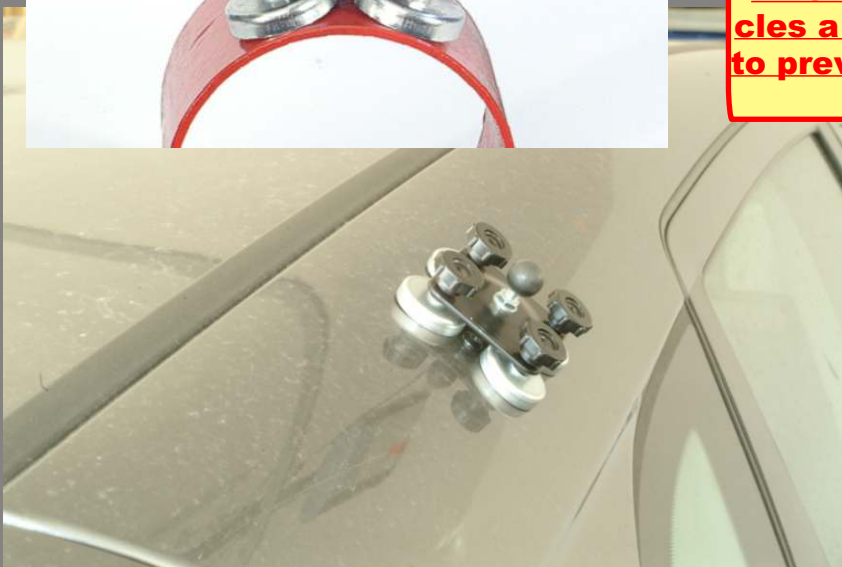

Magnetic Mount-tiltable, 4x32mm,DKG
With 4 magnets (32mm each) with very strong holding power.
Magnets can be tilted to adjust curved objects.
Magnets and base plate can be disassembled for easy detachment, if magnets are holding too strong.

1/4" Version:

663121 6x6cm

Go-Q version:

66312q 6x6cm

Adaptable Magnetic Mount 3 x 63 mm

Very big holding power due to tiltable magnets
Gigantic Magnetic Mount XHD with 3 x 63mm magnet
With 25mm double ball joint system DKG

A real Herculan Mount
Fits curved objects too
Holding Power appx. 87 kg
(on 10mm steel - static load)

Ideal for
curved
objects

25 mm
balls



3 x 63mm
magnet

With tumb nuts for easy detachment (if magnets are holding too strong)


Warning:
Must not be used on regular traffic roads.
When attached to moving vehicles a safety leash must be used to prevent device from dropping.

Magnetic Mount-tiltable, 3x63mm, DKG
With 3 magnets (63mm each) with very strong holding power.

Magnets can be tilted to adjust curved objects.

1/4" Version:
663131

3/8" Version:
66313h

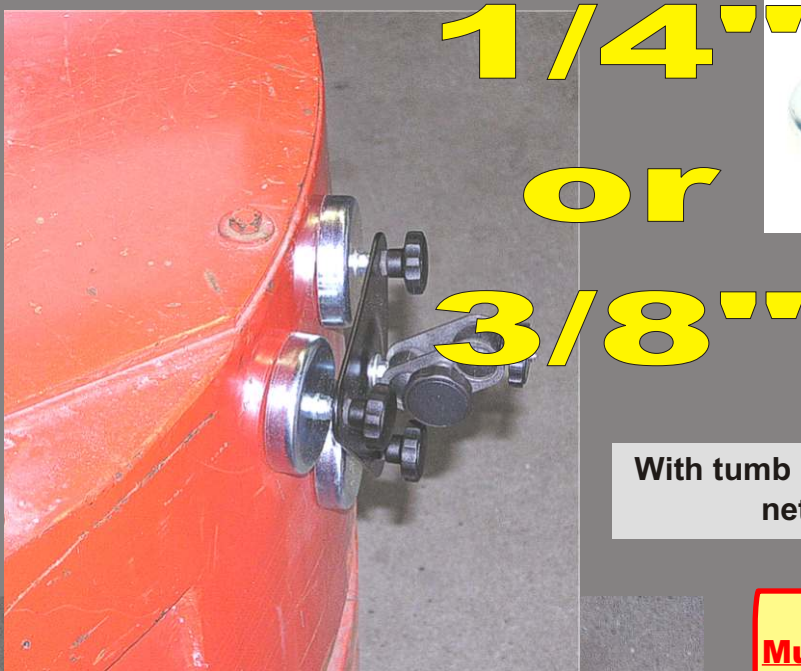

Vacuum Suction Mounts XHD

With DKG double ball joint system for a gigantic range of adjustment !

Type VARIO has adjustable elastic hook and loop closures for shaft diameters up to approx. 28 mm.

XHD POWER Vacuum Suction Mount, Dia=100 mm

With HD Aluminium Body
Gigantic holding power



**XXL 100 mm
diameter**



Price cut

POWER Suction Mount XHD 100, DKG
Extremely large vacuum cup with rocker lever. For
fixing on glass and other plain, airtight surfaces.

Version with 1/4 inch camera thread:

663501 100mm; 1/4"

VARIO Double Version (long) 7 cm long:

663511 Vario double

VARIO Single Version (short) 3cm long:

66351k Vario single, short

Go-Q Link System:

66351q Go-Q



**Go-Q
Link**

Extremely short joint system

Vacuum Suction Mounts


With ball joint system for a gigantic range of adjustment !

Vacuum Suction Plates with 40 and 50 cups

Extra large, heavy duty suction mounts with 4 large suction cups.
For a secure fixation; works also with larger cameras.
It's ideal even for slightly curved surfaces.
May be used on glass or any other plain, air-tight and clean surface.
Cups may be replaced individually.

Holding power (comparison):

Quadruple Pod with 50mm cups has a holding power 56% more than quadruple pod with 40 mm cups

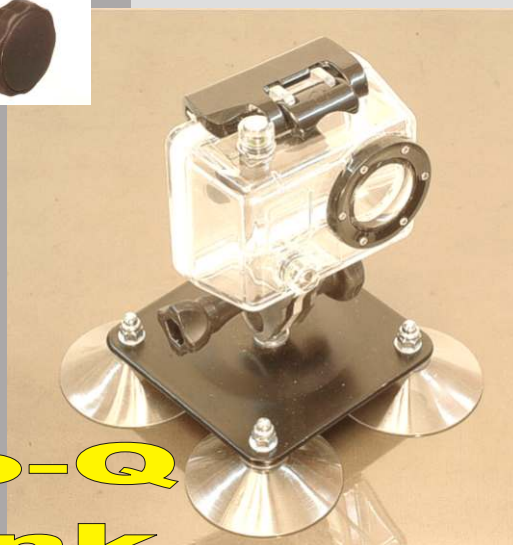

Vacu Suction Plate HD, 4-cups

2 sizes available:

1. Base plate 60x60 mm, 4 suction cups with dia D=40mm
2. XL-HD version: Base plate 80x80mm, 4 XL-suction cups with dia D=50mm

Base plate 60x60 mm, cup dia 40 mm

- 66358g 1/4 inch
- 66358v Vario double, 7 cm long
- 66358k Vario single, 3 cm long
- 66358q Go-Q Link System

XL-HD Base plate 80x80 mm, cup dia 50 mm

- 66359g 1/4 inch
- 66359v Vario double, 7 cm long
- 66359k Vario single, 3 cm long
- 66359q Go-Q Link System



Herculian TRIPLE Suction Mount

With ball joint system for a gigantic range of adjustment !

**Gigantic Suction Plates
with XXL 80mm cups**

With threaded bolt or Go-Q Link

Extremely strong magnet
Usable also for heavier cameras

Holding power (comparison):

Triple Pod with 80mm cups has a holding power 300%
more than Quadruple Pod with 40mm cups.

**80 mm
cup dia**

A real Herculian Mount

25mm balls



Vacu Suction TRIPLE Plate HD, 25mm
Gigantic cup diameter 80mm

With 1/4" bolt
66366g 1/4 inch - 25mm

With 3/8" bolt
66366h 3/8" - 25mm

16mm balls



Vacu Suction TRIPLE Plate HD, 16mm
Gigantic cup diameter 80mm

16mm balls
66360g 1/4 inch
66360q Go-Q Link System

Flex Mount Holders - DOUBLE USE

Comes with a 1/4" bolt (with thumb nut) and with an extra Go-Q socket

Magnetic Mount 63mm XHD + Flex Rod 15cm - Double Use

NEW

Magnetic mount D63, 1/4" + Go-Q

With an extra-large base (63 mm)
With 15 cm flex rod
With 1/4" threaded bolt and with G-Q socket.

666301 1/4" + Go-Q



Suction Cup D100mm + Flex Rod 15cm - Double Use 100mm diameter for extra large holding power

NEW

**XHD version
with dia 100mm**

Suction Cup + Flex Rod, 1/4" + Go-Q

With 1/4" threaded bolt and with G-Q socket

666311 1/4" + Go-Q



LIMB-LEASH with Flex Cord - Multi Use model

Guards your valuable gear against loss

Safely tether your actioncamera with a detachable mount

For Wrist and Forearm or for Upper Arm

Perfect also for UNDERWATER USE

NEW

Adjustable hook and loop closure guarantees a perfect fit

ORTEC LIMB LEASH strap has got an elastic middle section to adjust muscle tensions

Strap is provided with a super soft surface that is very pleasant to the skin

With elastic straight cord or elastic spiral HD Flex Cord (translucent or black)

With 1/4" camera screw or with Go-Q socket for GoPro(R) cameras

Cord may be detached and substituted if desired
Usable for individual cords too (for diving torches,
diving knives, pouches ...)

Detachable cord

With straight cord or with spiral cord



**All metal parts
 made of stainless steel
 or aluminium**



LIMB-Leash WRIST + straight cord
 Comes with an adjustable hook and loop closure system.

With detachable and replacable spiral cord

Available with spiral cord with 1/4" knurled screw or with Go-Q adapter for GoPro(R) cameras.

666501 1/4"
 66650q Go-Q

LIMB-Leash WRIST + spiral cord
 Comes with an adjustable hook and loop closure system.

With detachable and replacable spiral cord

Available with spiral cord with 1/4" knurled screw or with Go-Q adapter for GoPro(R) cameras.

666491 1/4"
 66649q Go-Q

GoPro (R) is a registered trademark of Woodman Labs, Inc., Half Moon Bay, CA, USA
 See further trademark notes at end of catalogue

Tel.: 0871-72727 / Fax: 0871-71297

35

www.Ortec-Products.de

ORTEC
 Products

LIMB-LEASH with Spiral Cord - Multi Use model

Continuation

Guards your valuable gear against loss

Safely tether your actioncamera with a detachable mount

Perfect also for UNDERWATER USE

NEW

Cord may be detached and substituted if desired

Usable for individual cords too (for diving torches, diving knives, pouches ...)

Spiral cord may be detached if desired


Adjustable hook and loop closure guarantees a perfect fit

ORTEC LIMB LEASH strap has got an elastic middle section to adjust muscle tensions

Strap is provided with a super soft surface that is very pleasant to the skin

Stretchable and elastic HD spiral cord (translucent or black) allows lengthening if desired

With 1/4" camera screw or with Go-Q socket for GoPro(R) cameras

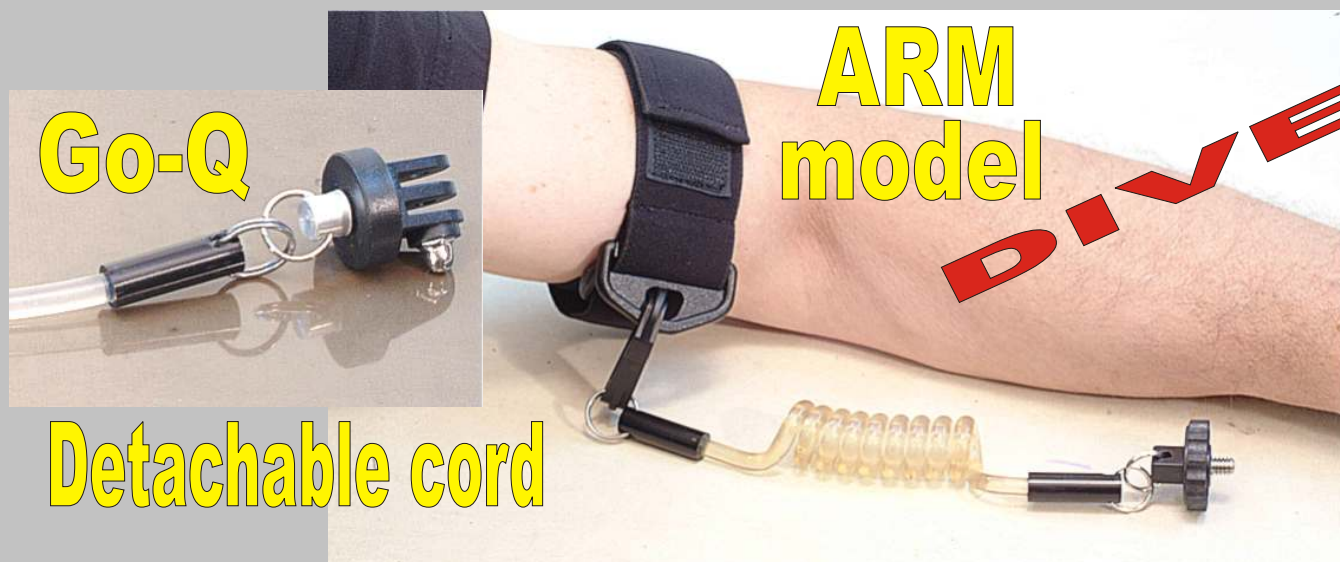

Go-Q

**ARM
model**

DIVE

Detachable cord

**All metal parts
made of stainless steel
or aluminium**

LIMB-Leash ARM

Comes with an adjustable hook and loop closure system.

With detachable and replacable spiral cord

Available with spiral cord with 1/4" knurled screw or with Go-Q adapter for GoPro(R) cameras.

666511 1/4"
66651q Go-Q



GoPro (R) is a registered trademark of Woodman Labs, Inc., Half Moon Bay, CA, USA
See further trademark notes at end of catalogue

Tel.: 0871-72727 / Fax: 0871-71297

36

www.Ortec-Products.de

ORTEC
Products

Body Mounts

Goggle Mount VARIO, rotatable

Rotatable version for ultimate angular adjustment
Embraces the elastic goggle head strap.
The camera is fixed by an adjustable, elastic hook and loop closure system for shaft diameters up to approx. 28 mm.
Fits nearly all common compact lamps and compact cameras.
For goggle straps up to a width of approx. 50mm.

For shaft lengths > 7cm

Rotatable



Goggle Mount for long shafts

With 2 elastic hook and loop closures (for the shaft fixation).

With rubber pad against slipping of shaft.

664001

For shaft lengths > 3cm

Rotatable



Goggle Mount for short shafts

With one elastic hook and loop closure (30mm wide) for the shaft fixation.

With rubber pad against slipping of shaft.

66400k

FINGER Mount - adjustable

Allows use even in the narrowest and most awkward areas

Very wide range of adjustability for finger and shank
With elastic hook and loop closures for finger and shank

Ranges

Finger range up to diameter appx. 28mm

Shaft range up to diameter appx. 28mm

Ideal for monitoring, repairs ...

Straps can be shortened to desired length (with scissors)



NEW



Finger Mount

Comes without torches, cameras ...
666581

Hard Hat Mounts - self adhesive


Self Adhesive Mount VARIO, elastic - round shape

Elastic base plate with self adhesive backing. Adheres extraordinarily on most materials (except low quality plastics). The camera is fixed with an adjustable, elastic hook and loop closure. VARIO design for different diameters, thus suitable for many CCD compact cameras.
Very elastic material - adapts even to slightly bent areas !


Fits long shafts > 7cm

dia appx. 65mm

Fits short shafts > 3cm

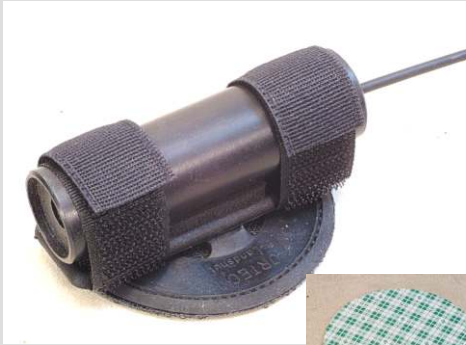

Self-adhesive

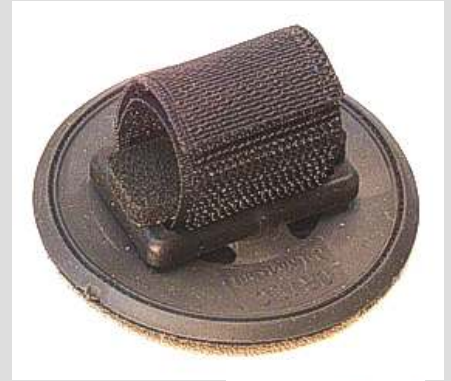

Adhesive Mount VARIO round, double
With extra rubber pad against slipping of shaft.
One adhesive patch included.
66425g **Vario**

Spare self adhesive patches (double sided):
664271 **round, 2 pieces**

Adhesive Mount VARIO round, short
With extra rubber pad against slipping of shaft.
One adhesive patch included
66425k **Vario**

Spare self adhesive patches (double sided):
664271 **round, 2 pieces**



Self Adhesive Mount VARIO, elastic - rectangular shape

Fits long shafts > 7cm

appx. 70x45mm

Fits short shafts > 3cm



Self-adhesive



Adhesive Mount VARIO rect., double
With extra rubber pad against slipping of shaft.
One adhesive patch included.
66428g **Vario**

Spare adhesive HD loop patches:
664291 **rectangular, 2 pieces**

Adhesive Mount VARIO rect., short
With extra rubber pad against slipping of shaft.
One adhesive patch included
66428k **Vario**

Spare adhesive HD loop patches:
664291 **rectangular, 2 pieces**

Tel.: 0871-72727 / Fax: 0871-71297

39

www.Ortec-Products.de

ORTEC Products

Strap fixation clips for helmet edges

Also ideal for helmets with wide edges

Fits helmets edges with a width up to appx. 10mm

Hook and loop closure straps may be shortened with scissors if desired

Adjustable to various strap widths

Fits all straps with a width up to appx. 40mm

Prevents straps from slipping

NEW



Strap fixation clips for helmet edges
With adjustable hook and loop closure for straps
up to 40mm

Set contains:
4 clips with hook and loop closure
664661

Hard Hat Mounts - removable

VARIO Hook and Loop Mount Industrial - round, removable

A self-adhesive loop patch is bonded to the helmet. The mounting has a hook backing to be attached to the above mentioned helmet loop patch.
 Very elastic material - adapts even to slightly curved areas !
 Fits shaft diameters with a width up to approx. 28 mm.
 With elastic hook and loop camera fixation.

Fits long shafts > 7cm

dia appx. 65mm

Fits short shafts > 3cm



The round base (approx. 65mm)
 is particularly suitable for small areas.

Removable



Hook+Loop Adapter VARIO ind. round
 With extra rubber pad against slipping of shaft.
 71429g

Spare adhesive loop patches:
 714191 round, 2 pieces

Hook+Loop Adapter VARIO ind. round
 With extra rubber pad against slipping of shaft.
 71429k

Spare adhesive loop patches:
 714191 round, 2 pieces

VARIO Hook and Loop Mount Industrial - rectangular, removable

Fits long shafts > 7cm

appx. 70x45mm

Fits short shafts > 3cm



Removable



Hook n'Loop Mount rect,VARIO double
 With extra rubber pad against slipping of shaft.
 71423g

Spare adhesive loop patches:
 714221 rectangular, 2 pieces

Hook n'Loop Mount rect.,VARIO short
 With rubber pad to avoid slipping of camer
 714071

Spare adhesive loop patches:
 714221 rectangular, 2 pieces

Vented Helmet Mount STRAPIT

Hard Hat Tie Down Mount with 1/4 inch bolt

With 1/4 inch threaded bolt = standard camera thread

Tie down straps are adjustable for a tight fit

Base plate is equipped with a slip resistant rubber pad



Hard Hat Tie Down Mount-1/4"STRAPIT

With 1/4 inch threaded bolt.

Tie down strap is hooked on to the helmet edge.

Fits edges up to a width of appx 8 mm.

Strap may be shortened by cutting (melting of ends to avoid fringing).

Length of the strap is adjustable to fit various helmet sizes and shapes.

664361

Hard Hat Mounts - various

Hard Hat Elastic Mount Surveyer VARIO

For different shaft diameters and for hard hats
with narrow brim. Rotatable !



Hard Hat Elastic Mount SURVEYER

With pivot. Elastic rubber strap is hooked on three
spots on the brim of the helmet.

The length of the rubber strap is adjustable to fit
different helmet sizes and shapes.

With extra rubber pad for cam fixation

714241

Slot Mount for Industrial Helmets



Slot Mount

Can be inserted into suitable slots (at common in-
dustrial helmets).

Insert tongue: width 30mm; thickness 3mm

Version VARIO:

The camera is fixed by an adjustable, elastic hook
and loop closure which fits shaft diameters up to
approx. 28 mm. Thus suitable for most compact
CCD cameras

717951 VARIO double

Adhesive Hooks for Helmet Straps

ANCHOR Hook Kit for helmet straps - bendable

Keeps straps from shifting
No tape necessary any more
Aluminium - no plastic

Thus hooks can be bent for perfect adjustment to curvature

NEW



Spare adhesive patches
Replacement patches



Self adhesive patches for Hook Kit
 Self adhesive patches (double sided).
 Set of 4 patches
 66468a set of

Perfect also with removable adhesives like
tesa(R) Powerstrips (R) or 3M(R) Command
Strips(R)

Anchor Hook Kit Alum. - self adhesive
 Holds straps securely in proper position.
 Hooks come without holes
 Dimension: 30 x 18 mm

Included:
 4 hooks with self adhesive patches
 664681

tesa(R) and Powerstrips(R) are registered trademarks of tesa SE (Beiersdorf, Hamburg, Germany,
 3M(R) and Command Strips(R) are registered trademark of 3M, St. Paul, Minneso, USA
 All trademarks or registered trademarks named in this catalogue are property of their respective parties.
 Trademarks in this catalogue are being used for reference purposes only.

Helmet Mount HD ALUMINIUM - bendable

Bendable aluminium for a real perfect fit
No springy plastic



Fixation at surface:
1. With self adhesive pads
2. With screws
3. With suction cups

**Easily bendable legs even
for curved objects**



**With 1/4" bolt or
with Go-Q socket**



Helmet Mount ALUM. - Fixation Sets

Additional fixation kits make the helmet mount even more versatile

1. Suction cup set with 40mm cups

Set contains 3 suction cups, 3 washers, 3 nuts
66485a

2. Set of self adhesive spare pads

Set contains 3 adhesive pads
66485c

Helmet Mount ALUM. - bendable

Universal use - Mount fits nearly all objects

Size: Overall length from center to very end of each arm: 55mm. Larger version on request

Set contains:

One 3 leg base plate made of aluminium with three self adhesive pads (one for each leg)
Without housing

664851 black

With Go-Q base

66485q

If mounted at moving vehicles or other moving objects or persons mounts must be secured against loss by means of an additional cord.

Please see trademark details on last catalogue page

Vented Helmet Mount

**Vented Helmet Mount - with a maximum of adaptability
For a bomb proof hold**

Three choices for the attachment at the helmet.




For round, oval and contoured shafts.

Usable for shaft diameters up to appx. 45mm

With elastic hook and loop fastening strap for the shaft - for an extra tight tension.

Supersoft and adjustable rubber sleeve provides a perfect hold.

Comes with a stainless steel base plate with a rubber pad

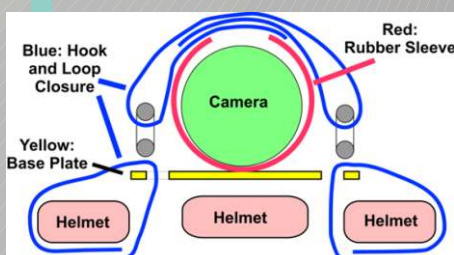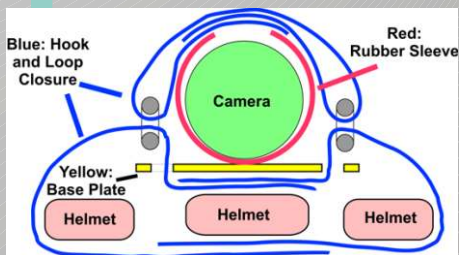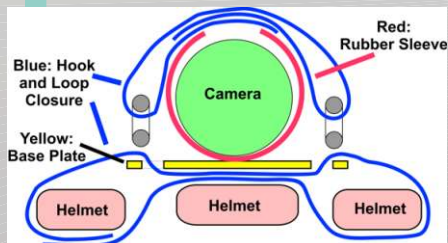

Vented Helmet Mount

Perfect for helmets with notches, e.g. ventilation slots,

With adjustable, elastic hook and loop tightening system.

Fits shafts diameters even up to approx. 45 mm.

Closure straps may be shortened with scissors if desired.

664341

Head Straps

Universal Mounts for innumerable uses

Head Strap Turn Softback Industrial - rotatable

With pivot for perfect illumination! With a super soft inside that is pleasant to the skin! With a very wide head adjustment range.

Adjustment of the elastic head strap by use of movable gliders.

Perfect also for "big-headed people".

With a hook and loop closure system which fits shaft diameters up to approx. 28 mm.

For long shafts > 7cm



Head Strap TURN Ind. for long shafts
With 2 elastic hook and loop closures (for the shaft fixation).

With rubber pad to avoid slipping of shaft.
71410g **black, rotatable**

For short shafts > 3cm



Head Strap TURN Ind. for short shafts
With one elastic hook and loop closure (30mm wide) for the shaft fixation.
With rubber pad against slipping of shaft.
71410k **black**

Head Straps HD - with extra Cross Strap

Universal HD Mounts for innumerable uses

Head Strap Turn CROSS Softback - especially for heavier cameras and flashlights

Comes with an additional cross fixation which provides an especially good hold
With pivot for perfect illumination!
With a super soft inside that is pleasant to the skin!

With adjustable head strap and adjustable cross strap (by use of movable gliders).
With an extra large hook and loop closure system which fits shaft diameters up to approx. 35 mm.
Cross strap may be removed if desired



Rotatable !



For long shafts > 7 cm

Head Strap TURN CROSS - long shafts
With 2 elastic hook and loop closures (for the shaft fixation).
Adjustable headstrap and adjustable cross strap.
Removable cross strap.

With rubber pad to avoid slipping of shaft.
714111 black, rotatable

For shaft dia
up to appx. 35mm

Cross strap
is removable



For short shafts > 3 cm

Head Strap TURN CROSS- short shafts
With one elastic hook and loop closure (30mm wide) for the shaft fixation.
With rubber pad against slipping of shaft.
71411k black

Head FRONT MOUNT

With DKG double ball joint system for a gigantic range of adjustment !

Type VARIO has adjustable elastic hook and loop closures for shaft diameters up to approx. 28 mm.

Very versatile Forehead Attachment of cameras

Head Front Mount DKG 16



With special skin friendly
backing of base plate

Front Mount

Ideal for all kinds of labour documentation, monitoring, video recording ...
A great help for education, science, lectures ...

Base plate has a special backing which is comfortable to the skin and which is slip resistant.

Comes with a 1/4" camera threaded bolt or with a Vario camera fixation for long (over 7 cm) or short (over 3 cm) camera shafts.

Version with 1/4 inch camera thread:

66483g with 1/4" bolt

VARIO version:

With rubber pad against slipping of shaft.

66483v Vario long
66483k Vario short



Head SIDE MOUNT 1/4" - rotatable

Rotatable for an ultimate viewing angle

Comes with a 1/4" camera threaded bolt for cameras with a 1/4" thread insert

Width of straps 25mm

Very versatile - for attachment at side of head

SIDE Mount 1/4"



NEW

Rotatable



SIDE Mount

Ideal for all kinds of labour documentation, monitoring, video recording ... A great help for education, science, lectures ...

All straps are elastic for a perfect fit.

666551 1/4"

HEAD STRAP CROSS for DRIFT_(R) Goggle Mounts

Ideal for DRIFT_(R) Goggle mounts and other goggle mounts

Drift _(R) goggle mount is rotatable for an ultimate viewing angle

ORTEC HEAD STRAP CROSS for DRIFT_(R) Goggle mounts:

- are made out of elastic straps with an especially skin friendly surface
- are made out of 40 mm straps and 30 mm straps
- are fully adjustable to head diameter and head height

Fits goggle mount plates with 30mm oblong hole for cross strap and 40mm slotted oblong holes for forehead strap

Ideal for DRIFT_(R) Goggle mount plates



Head Strap Cross for Goggle Mounts

Ideal for DRIFT _(R) Goggle mount or other strap mounts.
Goggle mount itself is not included.

Fits goggle mounts with 40mm elongated holes.

666561 for Drift _(R) goggle mounts

Goggle mount
itself not included

**Goggle Mount plate itself
not included**



DRIFT is a trademark respectively a registered trademark of DRIFT INNOVATION Ltd, USA
See further trademark notes at end of catalogue

Tel.: 0871-72727 / Fax: 0871-71297

Tripods HD - Aluminium extra solid

With the DKG double ball joint system for a maximum range of adjustment !

Pressure plates are made out of stainless steel and - contrary to plastics - are nearly indeformable for a particularly solid bracing of the joint balls.

Tripod ALUMINIUM HD - no plastic legs with universal attachment facility



ALUM.

Tripod HD Aluminum with joint system

With DKG double ball system or with Go-Q system for an extremely wide angle range!

Particularly solid, yet very light foldable tripod.

This tripod can also be attached to trees, poles... with a diameter of up to approx. 10 cm

1/4"Version:
662921

VARIO double version, 7 cm long:
662931

VARIO Single version (short) 3 cm long:
66293k

Go-Q Link System:
66293q



SAFE HOLD TELESCOPIC SUPER-Pole: 95-230cm

With 1/4" camera thread or Go-Q socket for GoPro(R) cameras

NEW

Allows unique angles

Very sturdy and shake proof model

Tubes made of HD aluminium alloy

For innumerable uses

**Telescopic range
from 95 cm to 235 cm**

Very sturdy construction
Appx. 450 grams only
Made of light weight aluminium
With left / right twist lock fixation

With comfortable and
slip resistant handle
Pole diameters
30mm + 25mm + 21mm

For an
ultimate view

Twist lock fixation

Shake-proof

Rattle-proof

3 - Link Go-Q Joint Base



**Go-Q
Base**

SAFE HOLD SUPER POLE Go-Q

Telescopic pole with tilt head.
Very sturdy - shake proof.


Expandable from appx. 95 to 235 cm
66281q

1/4" Threaded Bolt

SAFE HOLD SUPER POLE 1/4"

Telescopic pole with tilt head.
Very sturdy - shake proof.

Expandable from appx. 95 to 235 cm
662811

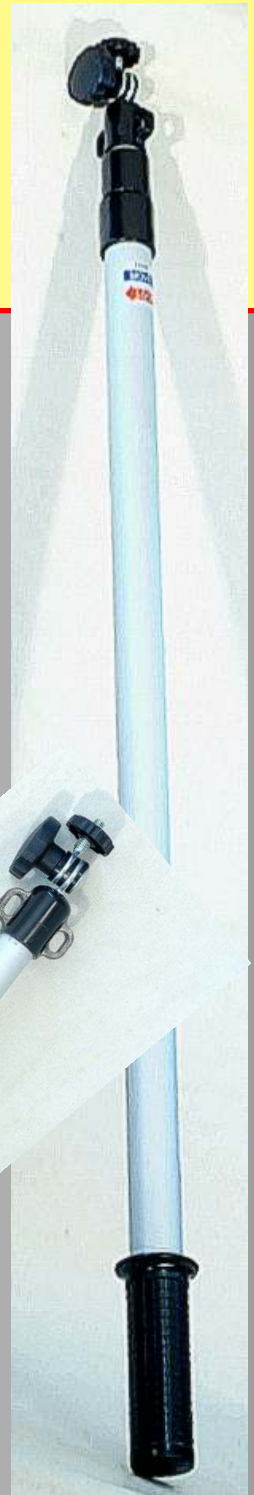

**Uses: large crowds,
high walls, hedges ...**

RIFLE SCOPE Mount HD

Scope Mount HD for nearly all scope diameters

Very tight hold


Recoil proof

Ultra light - appx. 36-40 grams only (depending on model)

For all common scope diameters

Comes with an additional base (flat) for a screw fixation at nearly any surface

1/4" Threaded Bolt

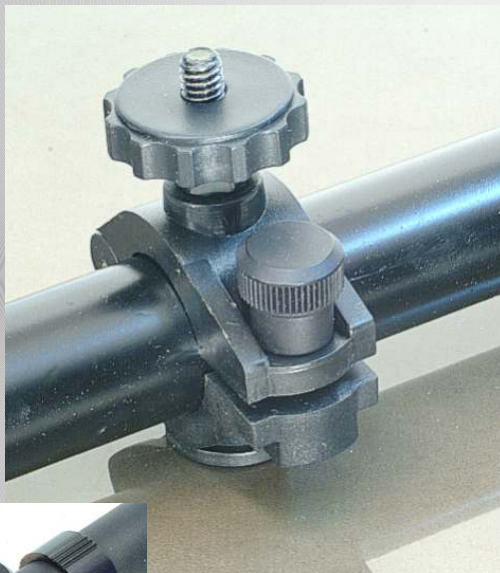

Scope Mount HD + 1/4"

All models with threaded bolt 1/4"

For various scope diameters SD (of scope tube):


66620a	SD 19 mm
66620b	SD 25 mm
66620c	SD 30mm
66620d	SD 34mm - on request

WOOD SCREW - extra solid

DKG = double ball joint system

All items with the DKG double ball joint system for a maximum range of adjustment !
Pressure plates are made out of stainless steel and - contrary to plastics - are nearly indeformable
for a particularly solid bracing of the joint balls.

Wood Screw - with 50mm XL handle

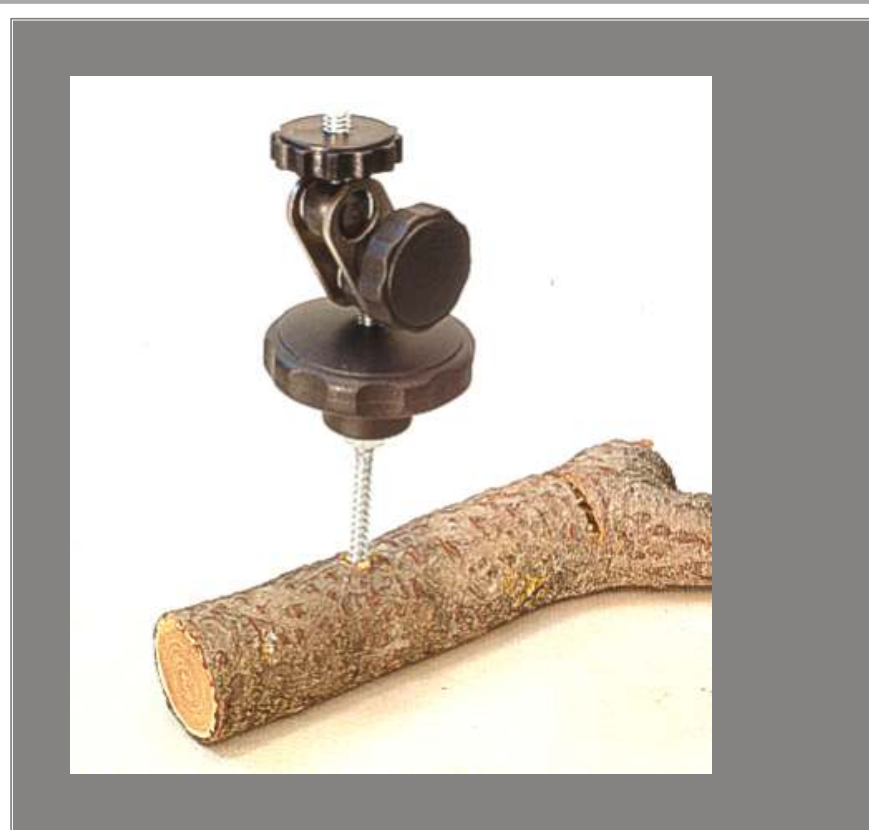

With XL 50mm handle



Wood Screw DKG16, D50
With DKG double ball joint system.
Provides facility to fix cameras on nearly any kind of wood.
Do not use on living wood (nature conservation).

It can be screwed into trees, wooden posts ...
Grip has a big diameter for easy screwing.
Guarantees an unjittered fixing of the camera!

1/4" Version:
663001

VARIO Double Version, 7 cm long:
662991
VARIO Single Version, 3 cm long:
66299k

Go-Q Link System:
66299q


Ground Peg with 1/4" threaded bolt

For nearly types of ground and soil

With a double ball joint system (DKG16) or Go-Q Link System for an extremely large range of the tilt head

With additional steel nut in order to guard against damages of the large knurled nut

With additional small knurled nut to locate joint head in position

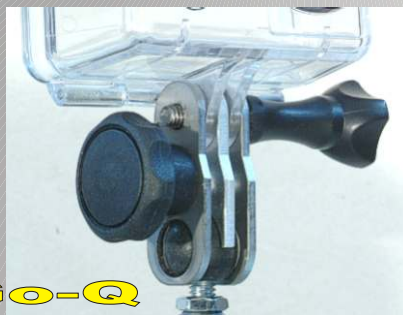

**Go-Q
Link**



Ground Peg + Ball Joint System

With a double ball joint system for an extremely large range of the tilt head.

Made of HD aluminium alloy.
Ultralight construction

Square shaped shaft against rotation.
Length of aluminium shaft appx. 15cm

Preferably not for rocky grounds

1/4" Version

662851

Go-Q Link System



66285q

Handle MINI 9cm

Special shape of handle for very ergonomic handling
Grooved surface for slipfree use and good insulation against the cold
With adjustable lanyard
Made of very tough plastic
Handle itself 9cm long

MINI Model Go-Q

MINI version

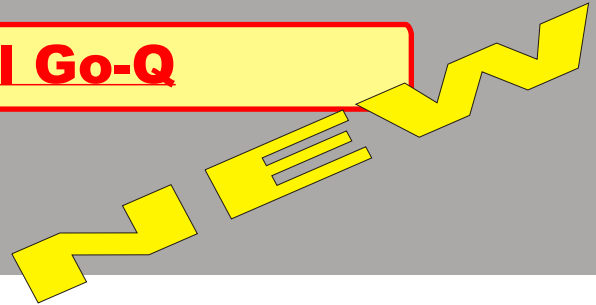

Handle MINI 9cm - Go-Q

Go-Q Versionn
66597r red
66597s black
66597b blau

Handle MINI 9cm

Special shape of handle for very ergonomic handling
Grooved surface for slipfree use and good insulation against the cold
With additional lanyard
Made of very tough plastic
Handle itself 9cm long

1/4" model MINI

Length of threaded bolt appx. 4.5-5mm

NEW

MINI version



Handle MINI + 1/4"

Length of treaded bolt appx. 4.5-5mm

1/4" Version

66596r	red
66596s	black
66596b	blue

Handle 11cm Go-Q

For a perfect viewing angle

Special shape of handle for very ergonomic handling

Grooved surface for slipfree use and good insulation against the cold

With additional lanyard (removable)

Made of very tough plastic

Handle itself 11cm long (without Go-Q socket)

Go-Q 3-Link Joint System



Cam Handle SAFE HOLD TILT+ Go-Q Base

Go-Q version:

66280r red
66280s black

Handle 11cm, 1/4"

For all cameras with 1/4" insert

Special shape of handle for very ergonomic handling

Grooved surface for slipfree use and good insulation against the cold

With additional lanyard

Made of very tough HD plastic

Handle itself 11cm long, Length of bolt appx. 4.5mm to 5mm

NEW



**With extra
short bolt**



Camera Handle 11cm, 1/4"

1/4" Version

66284r red
66284s black

SAFE HOLD LONG HANDLE Alum. HD, Go-Q - 30cm

For GoPro(R) camera housings

Allows unique angles

Very sturdy and shake proof model


Tube made of HD aluminium alloy - nearly indestructible

For innumerable uses

30cm



Very sturdy
Shake-proof
Rattle-proof



SAFE HOLD 30 - Long Handle Go-Q
Pole made HD aluminium alloy - not cheap and breakable plastic. Tube diameter 22mm

Very sturdy.

Length: 30 cm

Available colors: silver, red

66266n 30 cm - silver

66266r 30 cm - red

66266s 30 cm - black

Price cut

With adjustable wrist loop (with sliding cord stopper)

Lightweight yet very solid construction

With comfortable and slip resistant handle



SAFE HOLD 30 TILT - LONG HANDLE

For cameras with 1/4" female thread

Allows unique angles

Very sturdy and shake proof model

Tube made of HD aluminium alloy

For innumerable uses

NEW

NEW

**With adjustable wrist loop
(with sliding cord stopper)**


**Lightweight
yet very solid
construction**

**With
comfortable
and slip resistant
handle**

30cm



**Very sturdy
Shake-proof
Rattle-proof**



SAFE HOLD 30-Long Handle TILT 1/4"
Pole made of HD aluminium alloy - not cheap and breakable plastic.
Very sturdy.

Length: 30 cm

Available colors: silver, red, black

66264n 30cm - silver

66264r 30cm - red

66264s 30cm - black

SAFE HOLD Poles HD Go-Q - 60cm

With 1/4" camera thread or Go-Q socket for GoPro(R) cameras

Allows unique angles

Very sturdy and shake proof model

Tube made of HD aluminium alloy - nearly indestructible


For innumerable uses

**With adjustable
wrist loop
(with sliding
cord stopper)**

**Lightweight yet
very solid con-
struction**

**With
comfortable
and slip resis-
tant handle**

60cm

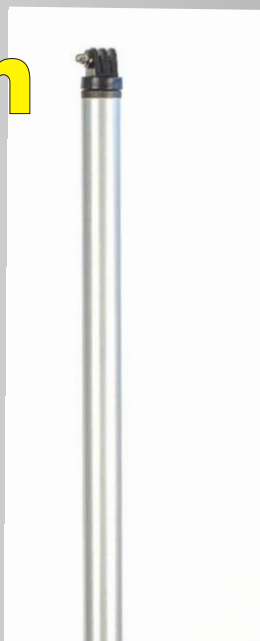

Very sturdy

Shake-proof

Rattle-proof



Price cut

SAFE HOLD Pole Go-Q

Pole made of aluminium alloy - not cheap and breakable plastic. Tube diameter 22mm
Very sturdy.


Available sizes: 60 cm

Available colors: silver, red

66267n 60 cm - silver

66267r 60 cm - red

66267s 60 cm - black



SAFE HOLD Poles HD TILT - 60cm or 100cm

With 1/4" camera thread or Go-Q socket for GoPro(R) cameras

Allows unique angles

Very sturdy and shake proof model

Tube made of HD aluminium alloy

For innumerable uses

NEW

**With adjustable
wrist loop
(with sliding
cord stopper)**

**Lightweight yet
very solid con-
struction**

**With
comfortable
and slip resis-
tant handle**





60cm



**Very sturdy
Shake-proof
Rattle-proof**

Price cut



SAFE HOLD Pole TILT + 1/4"

Pole made of aluminium alloy - not cheap and breakable plastic.
Very sturdy.

Available sizes: 60 cm. or 100 cm.

Available colors: silver, red

66265n 60 cm - silver

66265r 60 cm - red

66265s 60 cm - black

Elbow STEADY Handle EASY HOLD

For especially comfortable camera trips

With soft textured grip for a comfortable hold
Camera software must be able to rotate videos
With Go-Q adapter for GoPro(R) cameras

Very compact and handy to use

Deluxe version
Beautiful design



NEW



Elbow STEADY Handle EASY HOLD

Without housing, camera screw

With Go-Q socket
66671q

Universal Joint Extensions DKG - XHD

Double Ball Joint System DKG with Camera Thread

HD version DKG 16 has 16mm balls
XHD version DKG 25 has 25mm=1" balls


Extremely rugged and sturdy joint system
Heavy duty stainless steel plates
Rattle proof - no slipping - no shifting
Female version with steel thread insert
Available: HD or XHD versions

16mm balls



Two
independant
balls for an
incredibly
large adjust-
ment range

25mm balls

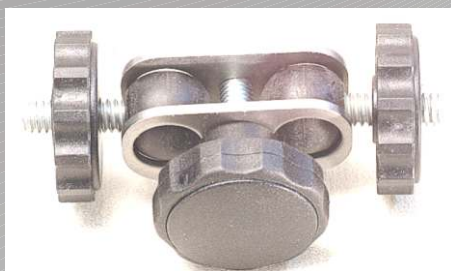

16mm - 25mm size comparison



Universal Joint Extensions DKG +1/4"

Available ball versions:

16mm balls or 25mm balls

Thread versions:

1. Male and male threads MT+MT
2. Female and male thread FT+MT

With 16mm balls = DKG16

HD version for action cameras
o.r. = on request

VM16018M1/4" MT + 1/4" MT

VM16018F1/4" FT + 1/4" MT - o.r.

With 25mm balls = DKG25

XHD version for heavier cameras

VM25018M1/4" MT + 1/4" MT

VM25018F1/4" FT + 1/4" MT - o.r.

1/4 inch Camera - Adapters

**1/4 inch Adapter Plate + Clip
for a heavy-duty camera fixation at 1/4" studs or bolts**

**Ideal for most finger cams (bullet cams)
and e.g. for V.I.O POV(R) 1.5 camera**



Adapter Plate 1/4 inch with clip

Allows attachment of cameras with round shafts at 1/4 inch camera studs or bolts.

For an especially tough camera fixation.

66455a **with clip 18-20 mm**

66455b **with clip 20-23 mm**

66455c **with clip 23-25 mm**

Please see trademark details on last catalogue page

Tel.: 0871-72727 / Fax: 0871-71297

VERSA Mount - Double Joint Screw Mounts

With 16mm or 25mm balls
With 1/4" bolt or Go-Q Link system

VERSA - MOUNT by ORTEC is a universal and extremely versatile system

Double Joint Screw Mount for the fixation at tin sheets, flat bars, planks ...

Universal mount system
with ball joint

Price cut
16mm balls+M6



Double Joint Screw Mount DKG 16
 With 1/4 inch bolt (male thread) + knurled nut
 With additional threaded bolt M6 and 2 nuts and 2 washers
 Ball dia 16mm, 2 nuts and 2 washers included
 L = Length of M6 bolt (appx)
 VM160311 L= 20 mm



16mm balls+M6

Double Joint Screw Mount Go-Q
 With Go-Q link system.
 Extremely tough and strong.
 With additional threaded bolt M6 and 2 nuts and 2 washers
 Ball dia 25 mm
 With M6 bolt, L = Length of M6 bolt (appx)
 VM16031q L= 20 mm

VERSA-Mount
XHD version with
25mm balls+M8



Double Joint Screw Mount +1/4"
 With 1/4 inch bolt (male thread) + knurled nut
 With additional threaded bolt M8 and 2 nuts and washers.
 Ball dia 25mm, L = Length of M8 bolt (appx)
 VM250311 L= 25 mm

Double Joint Extension with 16mm balls, 1/4 inch FT+1/4 inch MT

Ideal for GoPro(R)

Double Ball Joint Extension DKG 16
 With 1/4 inch stud (male thread) + knurled nut
 With 1/4 inch female thread (for all common camera mounts).
 Socket made of aluminium (silver colour) or hex-shaped brass. Ball dia 16mm
 VM160301



Double Joint Extension + Go-Q Link
 With Go-Q Link system and with 1/4 inch female thread (for all common camera mounts).
 Socket made of aluminium (silver colour) or hex-shaped brass. Ball dia 16mm
 VM16030Q

Please see trademark details on last catalogue page

Tel.: 0871-72727 / Fax: 0871-71297

68

www.Ortec-Products.de




ORTEC
 Products

1/4 inch VARIO Adapters

1/4 inch Adapter Plate with Adjustable Camera Fixation (=VARIO)

Allround adapter for the use of cameras which do not come with a camera thread.

Shafts of nearly all shapes may be mounted.

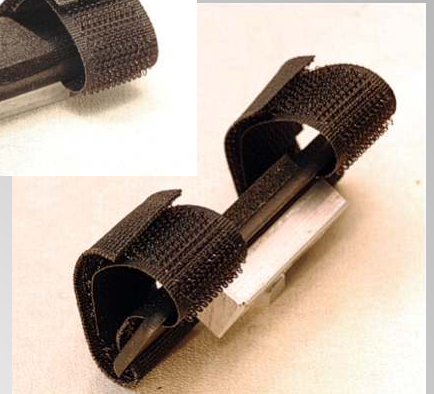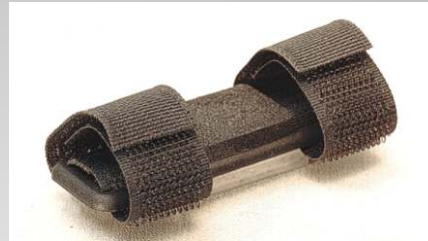

Vario Mount 1/4"

For an attachment of cameras without camera thread to 1/4" camera threaded bolts (for instance flex mounts).

VARIO version:

Vario version for various diameters. The camera can be fixed using an adjustable and elastic hook and loop closure system. Two versions available.

1. VARIO DOUBLE version:

For shafts more than 7cm long

2. VARIO SINGLE version:

For shafts more than 3cm long

664601 Vario double

66460k Vario single

USES - APPLICATIONS some examples

Flex Mounts



Suction Mounts



HD Flex Mounts and Flex Rods

Flex Mount with **KNURLED NUT**

All ORTEC Flex Rods are particularly rigid
All ORTEC Flex Rod end pieces are made of rustfree BRASS
All ORTEC Flex Rods come with a 1/4" thumb nut

Flex Mount HD M8 metric + 1/4 inch




Flex Mount - M8 female / 1/4" male

Flexible steel rod for perfect positioning.
Comes with a male thread MT and a female thread FT
1 female FT and 1 male thread MT.
Usable length of female thread appx. 8mm

VM00851 M8 FT + 1/4"MT, 6 inch
VM00861 M8 FT + 1/4"MT, 12 inch

Other sizes and threads on request.

Flex Mount HD 1/4 inch + 1/4 inch

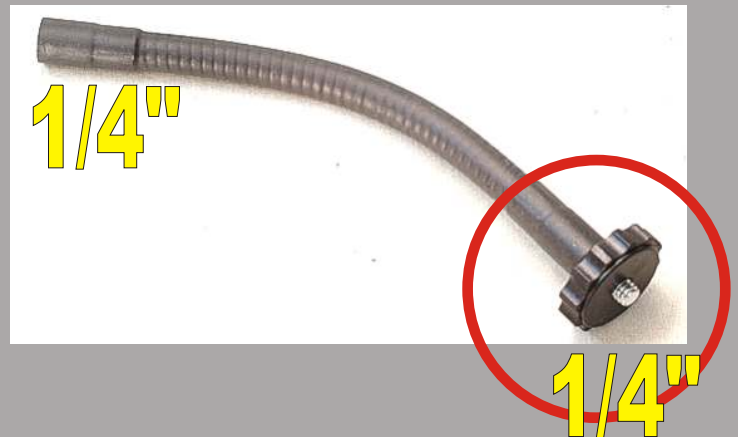

Flex Mount - 1/4" female / 1/4" male

Flexible steel rod for perfect positioning.
Comes with two 1/4" threads.
1 female FT and 1 male thread MT.

VM0091R 1/4" FT + 1/4"MT, 6 inch
VM0092R 1/4" FT + 1/4"MT, 12 inch

Other sizes and threads on request.

Leash Eye Set for GoPro(R) Thumb Screws

Elastic Leash Eye to attach a safety cord to original GoPro(R) thumb screws

Fits original GoPro(R) thumb screws

No more fear of camera loss

Elastic eye version for maximum noise reduction

For underwater use too

Elastic eye has a slightly tight fit in order not to come off too easily

Set contains:

1 elastic eye, 1 HD plastic hook, 2 tethers (cord), 1 cord lock



Leash Eye Set for GoPro(R) Screws

Includes: 1 elastic eye, 2 cords, 1 hook, 1 cord lock

663851



Please see trademark details on last catalogue page

Tel.: 0871-72727 / Fax: 0871-71297

71

www.Ortec-Products.de

ORTEC
Products

Camera Safety EYE Screw - Set

Made for camera safety
Ideal for action cameras and pocket cameras

Camera Eye Screw 1/4" with lanyard

Eye Screw with additional lanyard and cord lock
With rubber washer

NEW



Camera Eye Screw - Set

Screw with 4mm hole
Set includes:
1 eye screw, 1 rubber washer, 1 lanyard and 1
cord lock.
VD00071

Camera Screw 1/4" and Knurled Nut 1/4"

Made especially for 1/4 inch camera threads

Camera Screw: 1/4 inch large, galvanized steel bolt



Camera Screw - 1/4 inch, large

With a 1/4-20 inch threaded bolt (zinc coated).

Length of thread L (appx.)

Outer diameter appx. 32mm

VM0004a L=7 mm, set of 2

VM0004b L=10 mm, set of 2

VM0004c L=13 mm, set of 2


VM0004d L=16 mm, set of 2

VM0004e L=20 mm, set of 2

Knurled nut: 1/4 inch with stainless steel thread

Set of 2

Steel insert

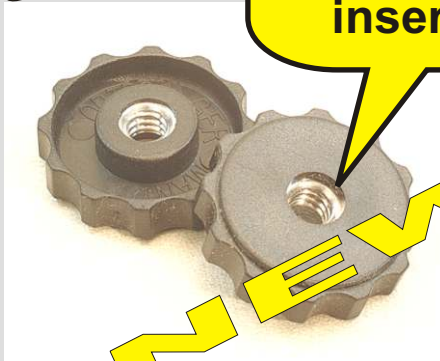

Knurled nut 1/4"+stainless steel thread

With a 1/4 - 20 inch female thread insert made of stainless steel.

D = appx 30mm (outer diameter).

Set of 2 pieces

VM00021 2 nuts

Knurled nut: 1/4 inch



Knurled nut - 1/4 inch camera thread

With a 1/4 - 20 inch female thread.

D = appx 30mm (outer diameter).


Set of 2 pieces

VM0001d D 30mm, set of 2

Miscellaneous

TWIN-LOC HD - self adhesive mushroom fastener
For high tensile strength and an extremely tight hold
With very robust mushroom stems - very durable
Releasable

Much tighter hold than normal hook and loop closures
Flexible

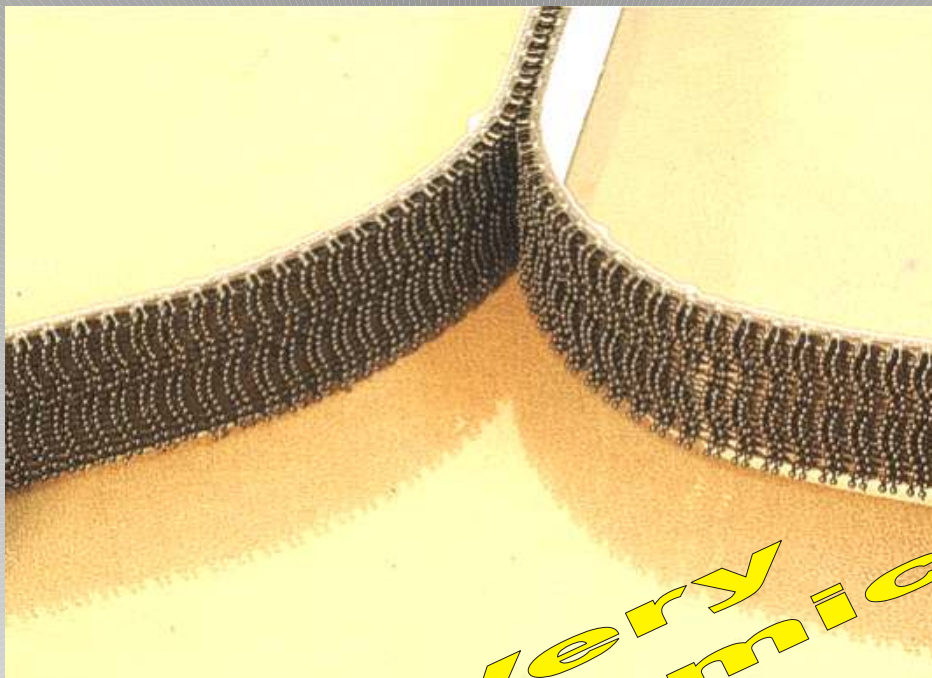

Very Economical!

TWIN-LOC HD mushroom fastener

25mm wide

Mushroom like stems for high tensile strength.

With strong self adhesive acrylic backing. Bonds to many substrates - also for low energy surfaces. Two identical layers will work with each other.

50 cm single layer roll = 25cm double layer:

664691 50 cm single

100 cm single layer roll = 50cm double layer:

66469d 100cm single

International terms

Excerpt and supplementation of our general terms and conditions for business, delivery and payment

Prices:

Our prices are in EUROS and are always subject to change without notice. Our offers are always exempt from a delivery guarantee. Errors and modifications excepted! Please ask for special pre-order and quantity discounts. Net prices are asterisked (*), as they are excluded from discounts.

Delivery: Shipping ex works plus costs for packaging

Export within the EU: A minimum order of € 100.-- applies, if less than that we will add € 10.-- as an extra service charge.

Export beyond EU: A minimum order of € 500,— applies, if less than that we will add € 15.-- as an extra service charge.

Payments:

Payments must be free of charge. All export deliveries require wire transfer prepayment or an irrevocable Letter of Credit. Open account terms require the approval of Ortec R.C.F. GmbH, Germany and are subject to separate terms.

Quantities: All products must be ordered in packing units or multiples of them.

General information and liabilities:

Upon coming into effect of this price list, all previous price lists lose validity. Errors and modifications excepted. We reserve the right to reject deliveries.

No claims can be made concerning errors of any type in this catalogue.

Ortec is not liable in case that any of the products offered in this catalogue might possibly be in breach of third party patents, design patents, utility patents, trademarks, registered trademarks and so on. No claims can be made if such an event might occur.

We deliver exclusively according to our general terms and conditions of business (full details see inside back cover of our print catalogue). You can also see our complete terms of business on www.Ortec-Products.de.

Net prices are asterisked (*), as they are excluded from discounts.

Prices are effective May 10th, 2014



ORTEC R.C.F. GmbH
D-84030 Landshut, Germany

Tel.: 0049 - 871-72727

Fax: 0049 - 871-71297

E-Mail: Ortec-Products@t-online.de

www.Ortec-Products.de

V.I.O. POV 1.5 is a trademark respectively a registered trademark of V.I.O. Inc., Marquette, MI, USA

GoPro (R) is a registered trademark of Woodman Labs, Inc., Half Moon Bay, CA, USA

DRIFT is a trademark respectively a registered trademark of DRIFT INNOVATION Ltd, USA

All trademarks or registered trademarks named in this catalogue are property of their respective parties.

Trademarks in this catalogue are being used for reference purposes only.

All sizes and descriptions in the catalog are only approximate information and nonbinding. Errors and modifications excepted. Along with the publication of this catalog, all previous catalogues and price lists lose their validity. Reprint - even in extracts - requires our express permission. All rights reserved. Copyright by ORTEC Reisefahrzeug-, Camping- und Freizeitprodukte GmbH, Landshut, Germany

Full company name: Ortec Reisefahrzeug-, Camping- und Freizeitprodukte GmbH



Ortec R.C.F. GmbH
D-84030 Landshut, Germany
Tel. (0049) 0871-72727 Fax.: (0049) 0871-71297
ortec-products@t-online.de
www.ortec-products.de

ORTEC
Products